

Updating Smartwall / Filterbank

Requirements for updating


- SD Card max. Size 32GB

Update via SD Card.


Step 1. Insert SD Card in Windows PC

Step 2. Right click on the SD card in the style finder and select formats

Step 3. Set file system FAT32 and disc name CLONE (See image)

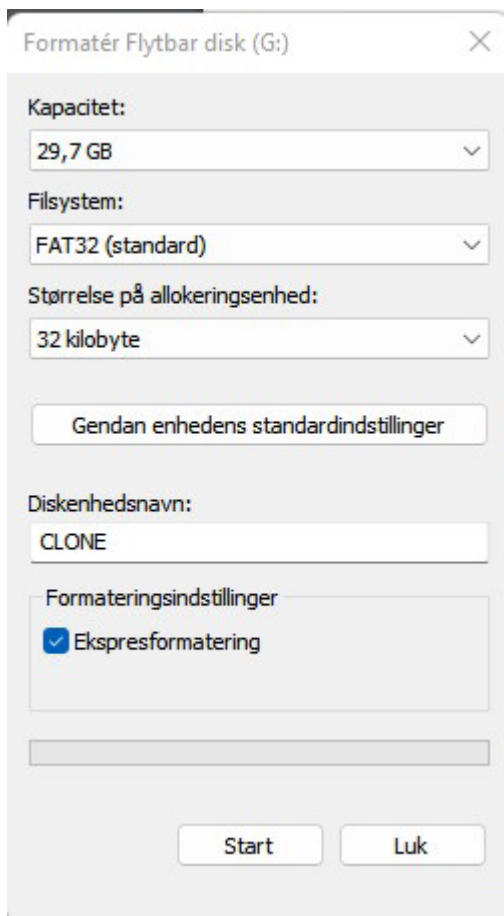


Step 4. Extract received zip file and move all content to SD Card CLONE (See image)

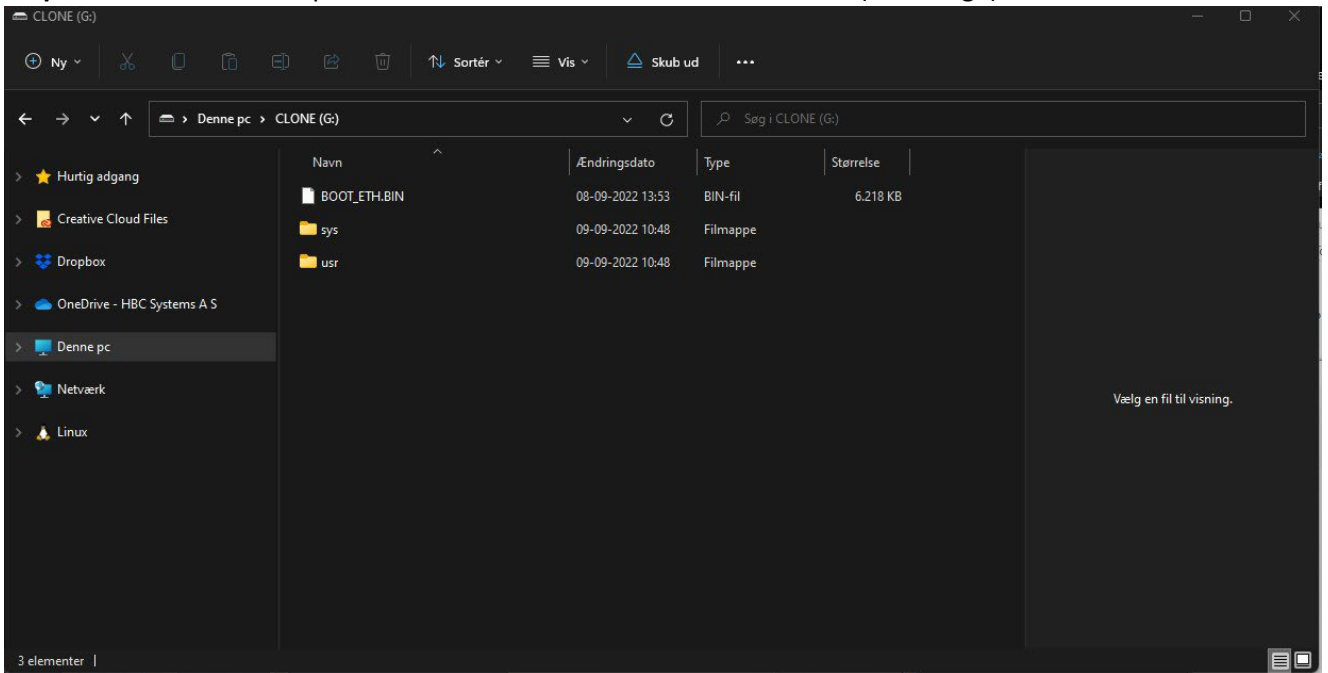

Step 5. Remove the SD card

Step 6. Switch off PLC on white

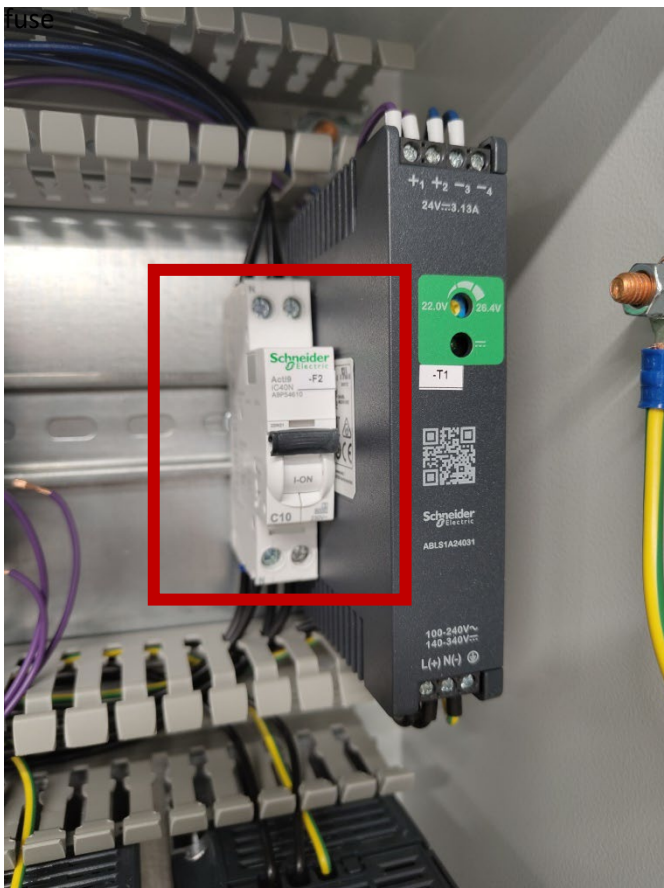

Step 8. Insert SD card and switch on white fuse



Step 9. Wait for 6 LEDs to light up constantly - Then remove the SD card.

